


INSTRUCTION SHEET EV-1


STEERING GEAR END

AXLE END

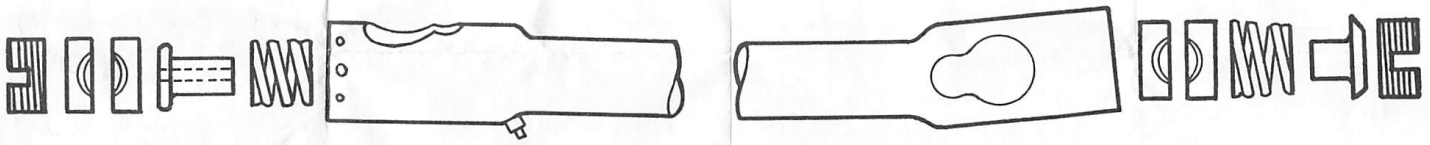

LAYOUT OF DRAG LINK & PARTS

End with greater distance from ball stud hole to end of drag link is axle end.



TIE ROD ENDS

Install short spring seat, spring and ball seat in both tie rod ends and install tie rod to steering arms. (Long spring seat is not used in this application.) Install outer ball seat and end plug into each tie rod end.

NOTE: The parts in this kit are designed to replace the worn or non-functioning original equipment parts in the vehicle as produced by the car factory. These parts are not designed for installation on vehicles where the suspension and/or steering systems have been modified for racing, competition, or any other purpose.