


TRUNK WEATHERSTRIP INSTALLATION

INST#100

A decided change has taken place in the installation of the rear compartment rubber weatherstrip on 1949 "A" Styles. The weatherstrip is installed in two sections. Across the top and part way down each side, the weatherstrip is cemented into the gutter of the opening. The remaining side and the bottom section is cemented to the flanges of the lid as shown.

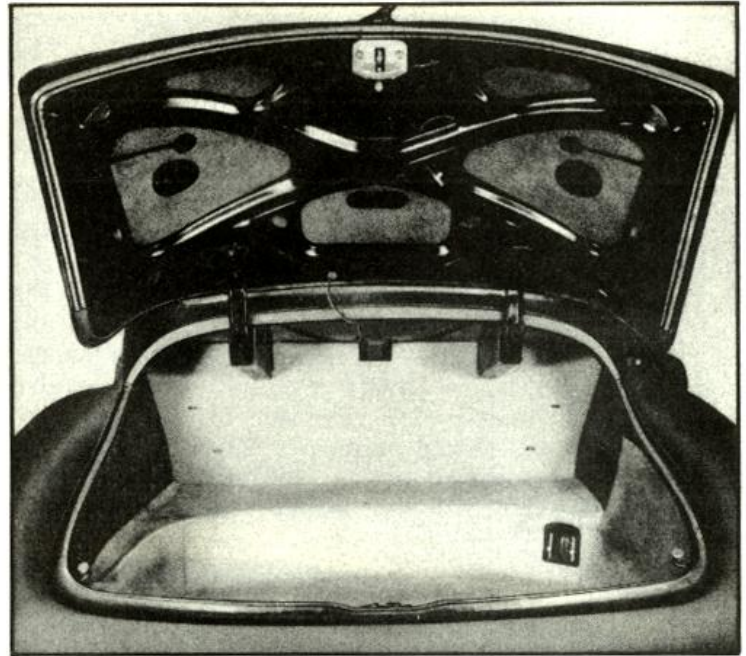


Trunk weatherstrip - sedans

4615298 49^52


Trunk weatherstrip - HDTP,CPE,CVT

4615298A 49^52

BODY SECTION
P/N 019737

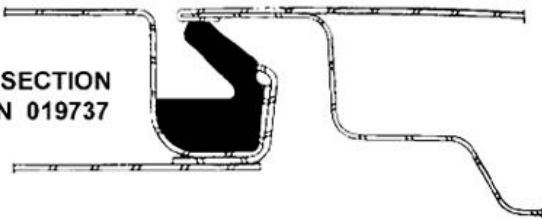

TRUNK LID SECTION
P/N 013174

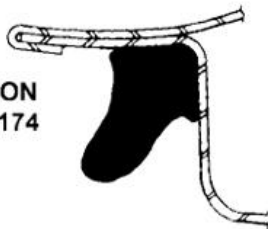

These cross section drawings show the attachment of the rubber weatherstrip around the rear compartment opening. The "TOP SECTION" drawing shows the position of the upper weatherstrip which is cemented directly into the gutter of the compartment opening and extends across the top and part way down each side. The "SIDE SECTION" drawing shows the cemented attachment of the weatherstrip along the side and bottom flanges of the lid. 3-M Synthetic Rubber Adhesive is used.